



1 2 3 4 5 6 7 8 9 10 11 12 13 14

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

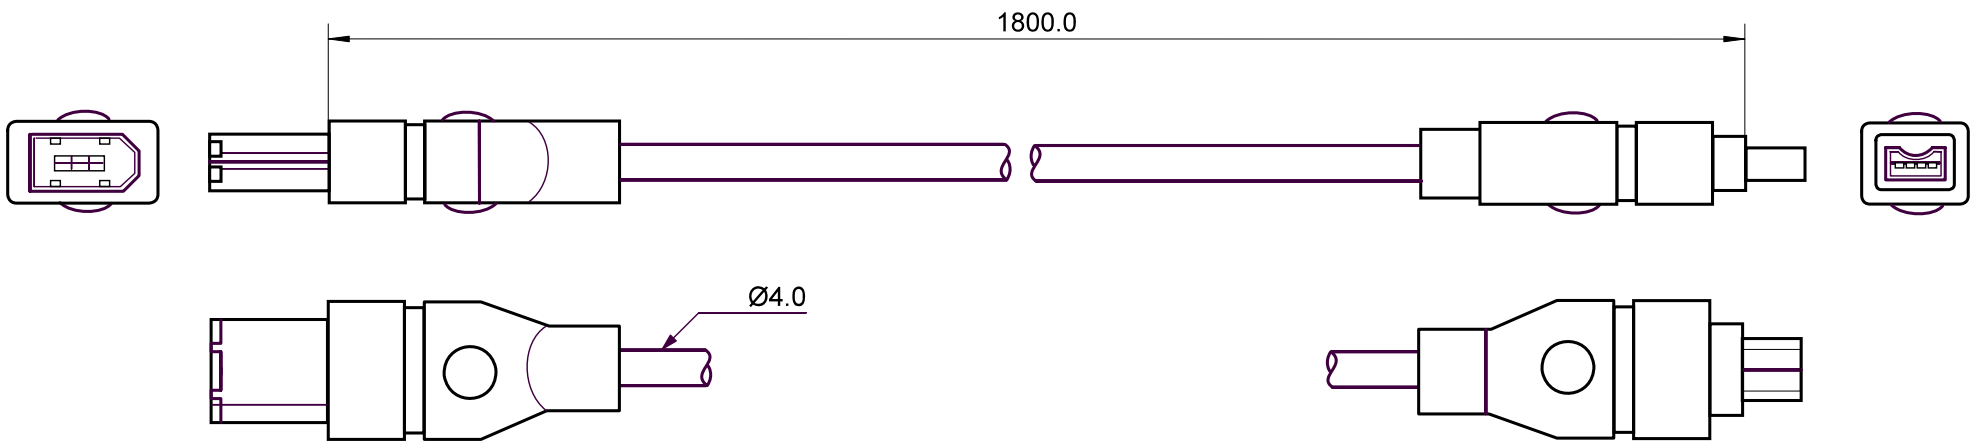

- FireWire™ Kabel; lose Ware
- 6 pol. Stecker > 4 pol. Stecker
- FireWire™ 400 Kabel - IEEE1394
- Datenrate: max. 400 Mb/s
- 28AWG x 4C+AL+B (64er Schirmung)
- RoHS-konform

- FireWire™ cable; bulk
- 6 pin plug > 4 pin plug
- FireWire™ 400 cable - IEEE1394
- data rate: max. 400 Mbps
- 28AWG x 4C+AL+B (64 braid)
- RoHS compliant

Änderungen		Datum	Name
Datum	Name	gez.: 29.02.2012	tf
		gepr.: 29.02.2012	tf
		Norm:	

Bezeichnung	Blatt
FireWire™ 400	
6P/4P 1.8m	
Zeichnungs-Nr.:	von
50311	



1 2 3 4 5 6 7 8 9 10 11 12 13 14