



ATX 1.0 -jack
24 contacts

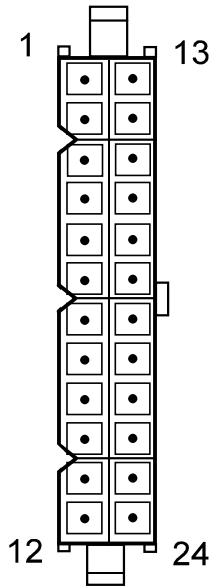

ATX 2.0 -plug
20 contacts

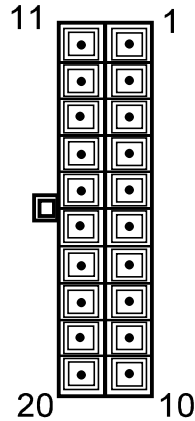

pin		signal	colour
ATX 1.0	ATX 2.0		
1	1	3,3 V	orange
2	2	3,3 V	orange
3	3	ground	black
4	4	5 V	red
5	5	ground	black
6	6	5 V	red
7	7	ground	black
8	8	PWR_OK	grey
9	9	5 VSB	purple
10	10	12 V	yellow
	11	12 V	yellow
	12	3,3 V	orange
11	13	3,3 V	orange
12	14	-12 V	blue
13	15	ground	black
14	16	PS ON	green
15	17	ground	black
16	18	ground	black
17	19	ground	black
18	20	-5 V	white
19	21	5 V	red
20	22	5 V	red
	23	5 V	red
	24	ground	black



- internes Stromkabel; lose Ware
- 24-pol. ATX-Buchse
--- 20-pol. ATX-Stecker
- Länge 0,15m
- RoHS-konform

- *internal power supply cable, bulk*
- *24 pin ATX jack --- 20 pin ATX plug*
- *cable length: 0.15 m*
- *RoHS-compliant*

Änderungen

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	26.10.2010	CAK S-05 EATX 24F -- ATX20M 0.15m	
		gepr.:	26.10.2010		
		Norm:		Zeichnungs-Nr.:	von
				68512	

